
ABH


Australian Barge Hire



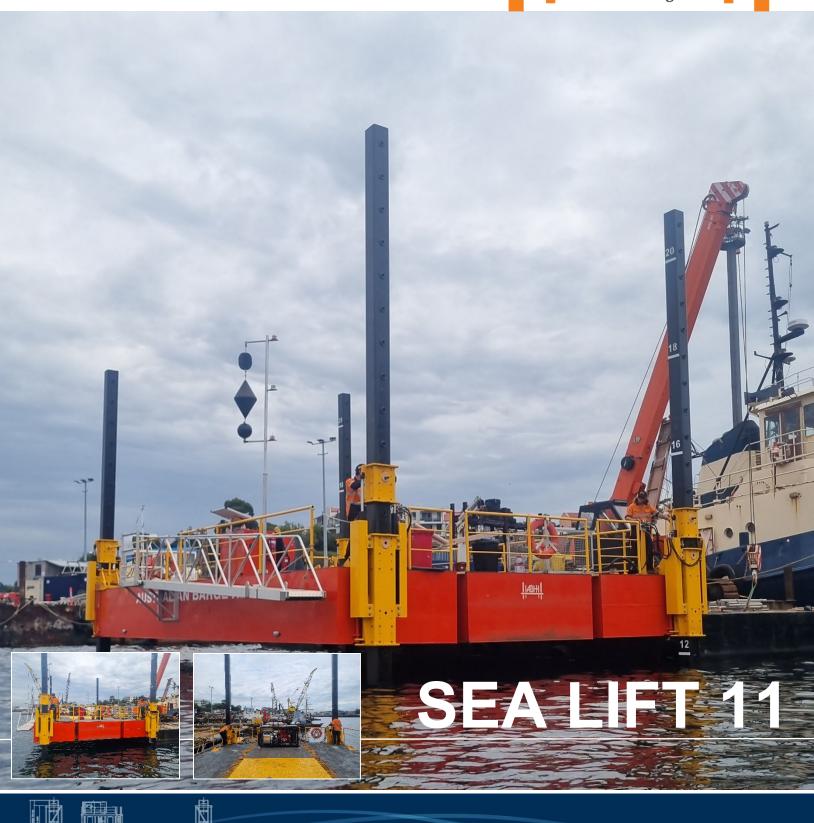

BARGE SELF ELEVATING PLATFORM

SEA LIFT 11

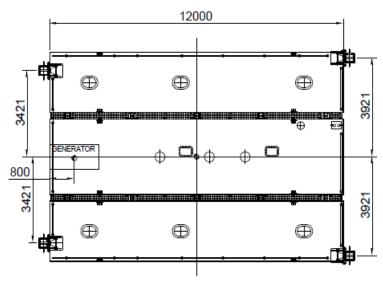

WATERLINE HULL WIND PRESSURE 259 N/M2 WAVE LOAD PRESSURE 320 N/M2 000 SEA FLOOR 1000

General

Type Jack Up Barge
Operator Australian Barge Hire Pty Ltd
Survey Australian Maritime Safety Authority
Classification AMSA 2C
Construction Steel
Road Transport 2 standard Semi Trailers
Working Depth Up to 15 metres

Main Dimensions

Length Overall	13.500	metres
Beam	8.2	metres
Depth	1.20	metres
Draft	0.250	metres
Displacement	25.30	tonnes (unladen)

Jacking System

Jacking system	hydraulic	
Jacking Rate	10	metres per hour
Load Lift Capacity	20	tonnes
Spud Length	7,15, 22	metres
Generator		kWA 10

Features

- 300mm Diameter Moon Pool
- Spud Cans
- Onboard Site Office
- Max 1 tonne Deck Crane
- Remote controlled gangway access
- Road Transportable
- Up to 20 tonne deck load

Note: The below figures are a guide only and a full analysis would need to be undertaken for project specific parameters.

Water Depth	Wave Height
5m	2.5m
10m	2.25m
15m	2m



Australian Barge Hire