



Australian Barge Hire

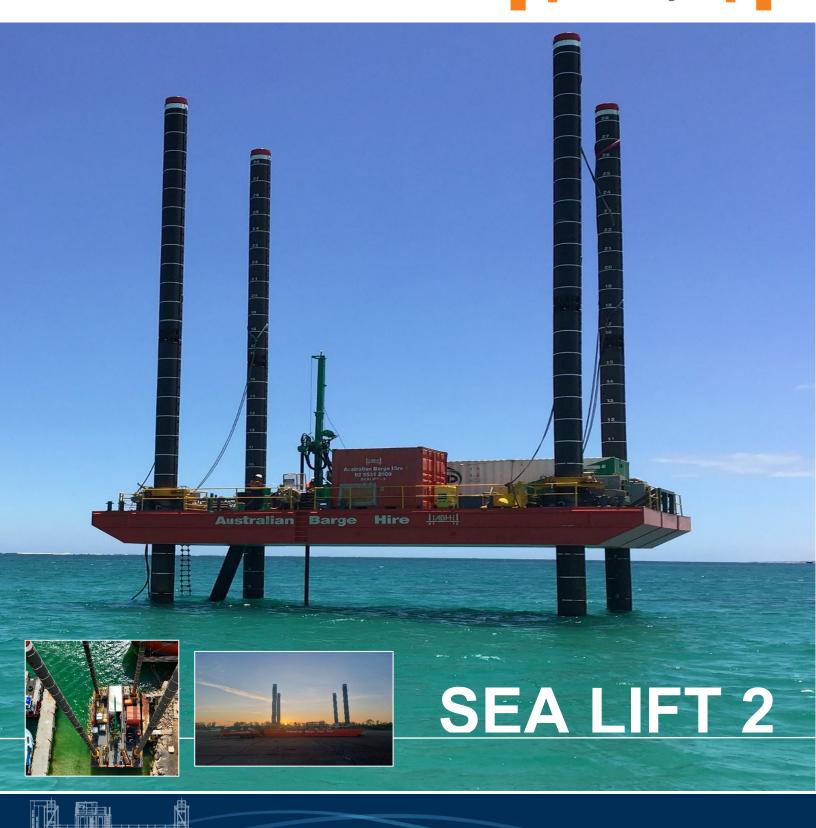

## BARGE SELF ELEVATING PLATFORM

# **SEA LIFT 2**

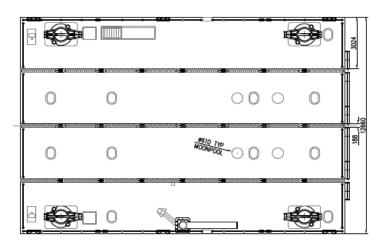

# HULL WIND PRESSURE 259 N/M2 WATERLINE WAVE LOAD PRESSURE 217 N/M2 SEA FLOOR 1000

### General

Type Jack Up Barge
Operator Australian Barge Hire Pty Ltd
Survey Australian Maritime Safety Authority
Classification AMSA 2C
Construction Steel
Road Transport 8 Extendable Semi Trailers
Working Depth Up to 20 metres

### **Main Dimensions**

Length Overall	18.00	metres
Beam	12.4	metres
Depth	1.60	metres
Draft	0.80	metres
Displacement	100	tonnes (unladen)

### **Jacking System**

Jacking systemElectronic over hydraulicJacking Rate18metres per hourLoad Lift Capacity80tonnesSpud Lengths12,18, 30metresPower UnitHPU 2 x 55kW

### **Features**

- 600mm Diameter Moon Pool
- 600 mm Diameter Rod Rack
- Onboard Site Office
- Remote control gangway access
- Remote controlled jacking operation
- Max 3 tonne Deck Crane
- Stable working platform
- Road transportable

Note: The below figures are a guide only and a full analysis would need to be undertaken for project specific parameters.

Water Depth	Max Wave
10m	3.0m
15m	2.5m
20m	2.0m

