
ABH

Australian Barge Hire





JACK-UP

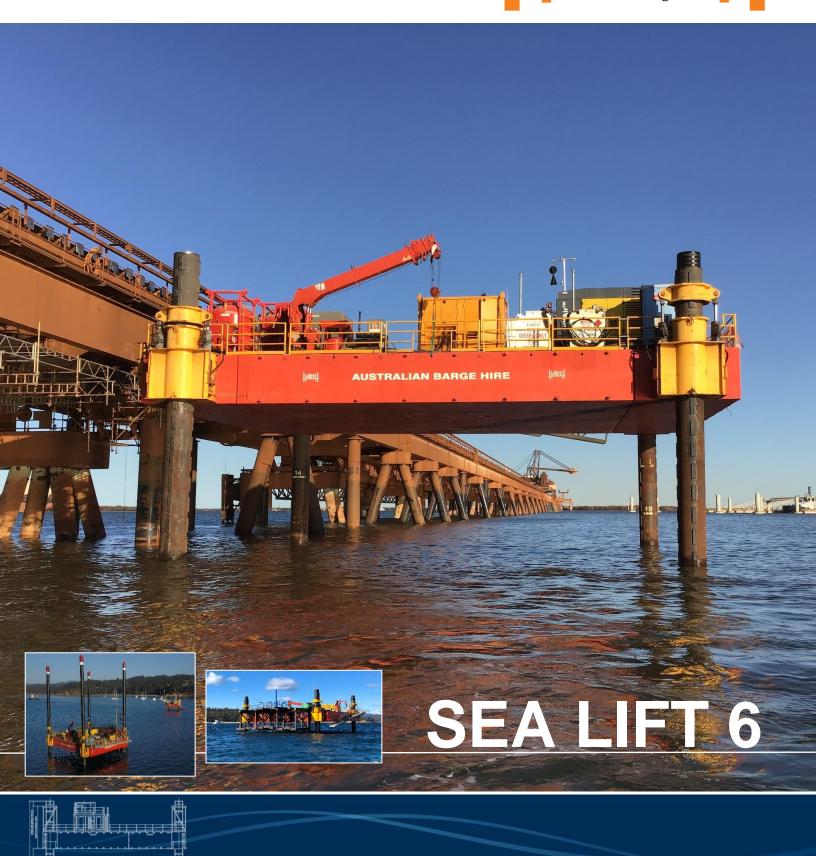

BARGE SELF ELEVATING PLATFORM

SEA LIFT 6

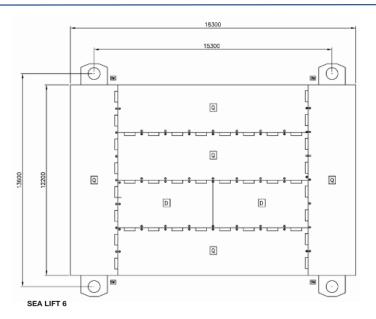

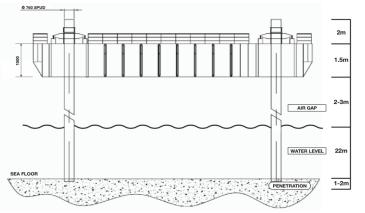

General

Type Jack Up Barge
Operator Australian Barge Hire Pty Ltd
Survey Australian Maritime Safety Authority
Classification AMSA 2E and 2C
Construction Steel
Road Transport 9 standard Semi Trailers
Working Depth Up to 25 metres

Main Dimensions

Length Overall19.81metresBeam14.50metresDepth1.50metresDraft0.91metresDisplacement202.68tonnes (unladen)

Jacking System

Jacking systemManual hydraulicJacking Rate12metres per hourLoad Lift Capacity80tonnesSpud Length17.3 - 30metresPower UnitHPU 1 x 55kW

Features

- 600mm Diameter Moon Pool
- Onboard Site Office
- Remote controlled gangway access
- Max 3 tonne Deck Crane
- Road Transportable

Note that the below figures are a guide only and a full analysis would need to be undertaken for project specific parameters.

Water Depth	Max Wave
10m	3.0m
15m	2.5m
20m	2.0m

Survival Condition Parameters Assumed:	
•	Wind Speed 20.6m/s
•	Current 0.77m/s
•	Deck Load 60 tonne
•	Leg Length 30m

